

Rostlöser
rust remover



Area of application: Loosens difficult screws, nuts, door hinges, etc.

Characteristic features: An oil that creeps underneath the rust preventing the treated components against corrosion and mechanical abrasion.

Part-no.	Size	Units
126.028	300 ml	12

Kupferspray
copper spray



Area of application: Lubricant for machines and engine components exposed to high thermal stress.

Characteristic features: Grease based lubricant with a very high amount of copper for temperatures from -30 °C to +1100 °C.

Part-no.	Size	Units
135.170	400 ml	12

Cockpit-Spray
cockpit spray



Area of application: Maintenance and cleaning agent for all plastic and rubber surfaces inside vehicles.

Characteristic features: The spray is silicone-free, anti-static and restores colours.

Part-no.	Size	Units
126.020	400 ml	12


X-Stand Classic
paint stand



Area of application: Height: 50 – 100 cm.
Max. weight: 50 kg.

Part-no.	Height	Units
137.349	50-100 cm	1

X-Stand Top
paint stand

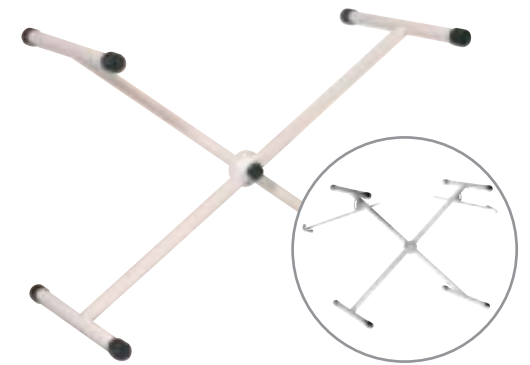

Area of application: Height: 50 – 125 cm.
Max. weight: 120 kg.

X-Stand incl. extension: Design like X-Stand big, however with two extension pieces of 55 cm each.

Part-no.	Construction	Units
138.851	big	1
138.852	big incl. extension pieces	1

Paint Trolley
paint stand



Area of application: Movable paint stand to the storage on doors, engine bonnets, etc.

Part-no.	Units
138.861	1


Multi Trolley
multi-functional table



Area of application: Multi-purpose paint table for large and small body components. With its accessories it can also be used for painting rims, etc.

Part-no.	Description	Units
138.846	Multi-functional table	1
138.847	Rim insert for Multi-functional table	1
138.848	Spare claws for Multi-functional table	1
138.849	Fixing arm for Multi-functional table	1
138.850	Multi-purpose holde for Multi-functional table	1


Magnetic Sanding Protection
edge protection

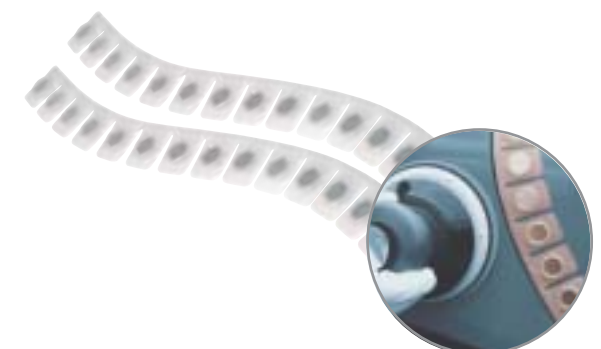

Area of application: Magnetic edge protection for car body parts during sanding.

Part-no.	Size	Units
130.992	4 x 55 cm	1

Magnetic Flat Strip
flat strip

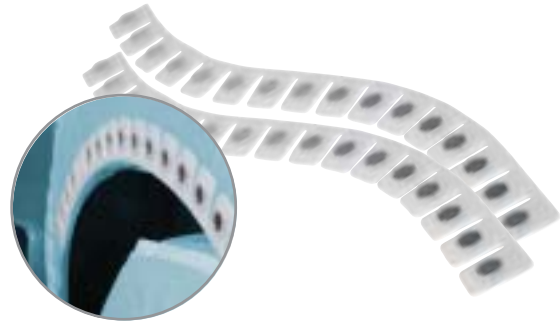

Area of application: Flat magnetic protective strip.

Part-no.	Size	Units
137.214	4 x 55 cm	1

Pump Spray
pressurized atomizer



Area of application: For applying (atomising) liquids evenly and constantly. Solvent resistant due to Viton seals.

Part-no.	Size	Units
137.744	1 l	1

Tyvek-Overall
protective suit for painting



Area of application: Protective overall for spray painters.

Part-no.	Size	Units
133.035	M	1
133.034	L	1
133.013	XL	1
133.193	XXL	1

Paint-Overall
protective suit for painting



Area of application: General purpose protective overall made from soft polyester.

Part-no.	Size	Units
139.232	S	6
139.233	M	6
138.472	L	6
138.473	XL	6
139.234	XXL	6

Paper Trolley
paper stand for 3 paper widths



Area of application: Paper-dispenser trolley for paper rolls with a width of 22, 60, 90 cm.

Part-no.	Units
138.862	1

Paper Trolley 1500
paper stand



Area of application: Paper-roll trolley for paper rolls with a width of max. 1,500 mm.

Part-no.	Units
139.101	1

MMIR Trolley
film stand



Area of application: Movable stand for MMIR films.

Part-no.	Units
125.737	1



Drymaster D

infrared dryer



Short-wave infrared dryer

- User friendly time indicator
- Automatic switch-off, if the distance is not appropriate
- Audible signal at the end of the drying period
- The integrated distance indicator enables a fast and precise adjustment of the distance from the panel
- Temperature sensor optionally available

Technical data:

Drying area: 1,0 x 0,8 m
 Number of cassettes: 3
 Rated capacity: 3 kW
 One-phase current: 220/240V.

Part-no.	Units
138.916	1

Drymaster XL

infrared dryer



Short-wave infrared dryer

- User friendly time indicator
- Automatic switch-off, if the distance is not appropriate
- Audible signal at the end of the drying period
- The integrated distance indicator enables a fast and precise adjustment of the distance from the panel.

Technical data:

Drying area: 1,0 x 1,2 m
 Number of cassettes: 3
 Rated capacity: 4,5 kW
 Three-phase current: 380/400V

Part-no.	Units
138.917	1

Drymaster S

infrared dryer



Short-wave infrared dryer

Design like Drymaster D, but without distance indicator.

- User-friendly time indicator
- Audible signal at the end of the drying period
- Temperature sensor optionally available

Technical data:

Drying area: 1,0 x 0,8 m
 Number of cassettes: 3
 Rated capacity: 3 kW
 One-phase current: 220/240V.

Part-no.	Units
138.915	1

Drymaster mini

infrared dryer



Short-wave infrared dryer

Manual device with stand

Drying area: 0,4 x 0,2 m
 Number of cassettes: 1
 Rated capacity: 0,85 kW
 One-phase current: 220/240V

Part-no.	Units
138.918	1

Lift Master
lifting platform



Area of application: Universal painting and car body platform for lifting vehicles. Outrigger incl. grids. Also available for self assembly.

Technical data:
Load-bearing capacity: 3,000 kg
Platform height max.: 990 mm
Working height: approx. 1280 mm

Part-no.	Units
139.612	1

Lift Top und Classic
lifting platform



Area of application: Painting and car body platform for free access around the car, incl. grids in the outriggers. Also available for self assembly.

Engl neu->

Classic: Without grids in the outrigger

Technical data:
Load-bearing capacity: 3,000 kg
Platform height max.: 990 mm
Working height: approx. 1280 mm

Part-no.	Size	Units
139.225	Lift Top	1
139.613	Lift Cassic	1