

Liquid Masking
liquid masking film



Area of application: This water-based masking film is applied with a spray gun. The liquid material dries to a clear, non-bonding film protecting all coated vehicle surfaces against spray mist (of solvent and water-based paints), solvents, dust, welding sparks, polish splashes as well as from any light mechanical damage.

Processing equipment: Gravity-fed spray gun for water-based paints.
Recommended nozzle size: 1.8 - 2.2 mm.

Part-no.	Size	Units
138.718	19 l	1

MMIR Mask Cover
masking cover



Area of application: MMIR-Mask masking film for quick masking of large vehicle surfaces or components prior to painting.

Characteristic features: Static, good paint adhesion, slightly transparent, extremely high wear resistance
Temperature-stable up to 110°C.

Part-no.	Description	Units
126.240	covering Cap 5,6 m	26 covering Caps/Roll
126.241	covering Cap 6,3 m	26 covering Caps/Roll
125.552	wheel cover 15" 250 units/roll	250 covering Caps/Roll
125.555	mirror cover 100 units/bag	100 covering Caps/Roll

MMIR Mask Film
masking film – endless



Area of application: MMIR-Mask masking film for quick masking of large vehicle surfaces or components prior to painting.

Characteristic features: Static, good paint adhesion, slightly transparent, extremely high wear resistance.
Temperature-stable up to 110°C.

Part-no.	Dimension	Units
126.242	60 cm x 1200 m	1 roll
126.243	100 cm x 1200 m	1 roll
126.244	200 cm x 600 m	1 roll
126.245	300 cm x 350 m	1 roll
126.204	400 cm x 150 m	1 roll
126.246	400 cm x 300 m	1 roll (outside convolution)
136.535	400 cm x 300 m	1 roll (middle convolution)

MMIR Mask Light
masking film – endless



Area of application: Masking film for quick masking of large vehicle surfaces or components prior to painting.

Characteristic features: Static, good paint adhesion, infra-red resistant, transparent.
Temperature-stable up to 110°C.

Part-no.	Dimension	Units
137.351	400 cm x 200 m	1 roll (middle convolution)
137.352	400 cm x 400 m	1 roll (middle convolution)

MMIR Knife film knife

Part-no.	Units
125.437	50

Easy Mask
masking film – endless



Area of application: Masking film as a spray mist protection for quickly covering car body components.

Characteristic features: Provides no paint adhesion.

Part-no.	Dimension	Units
132.183	3,8 x 200 m	1 roll

Area of application: Masking foil with integrated masking tape for quickly covering windows, shock absorbers, bumpers, etc.

Characteristic features: For use with manual dispenser.

Part-no.	Description	Units
125.476	Refill-Roll 0,55 x 33 m	1
125.517	Refill-Roll 1,80 x 33 m	1
133.060	Roll 2,66x20 m (only mountable without handle)	1
133.056	little handle	1
133.057	big handle	1

Auto Mask
handy masking film incl. adhesive tape



Masking Paper Master
masking paper



Area of application: For covering vehicle body panels when painting.

Characteristic features: Specially sealed, extremely robust, solvent-resistant, elastic sodium paper.
Thickness: 40 g/m².

Part-no.	Dimension	Units
137.613	20 cm x 450 m	1 roll
137.614	60 cm x 450 m	1 roll
137.615	90 cm x 450 m	1 roll
137.616	100 cm x 450 m	1 roll
137.617	120 cm x 450 m	1 roll
137.618	150 cm x 450 m	1 roll

Masking Paper Top
masking paper



Area of application: For covering vehicle body panels when painting.

Characteristic features: Non-porous, robust, elastic sodium paper.
Thickness: 40 g/m².

Part-no.	Dimension	Units
137.620	20 cm x 450 m	1 roll
137.621	60 cm x 450 m	1 roll
137.622	90 cm x 450 m	1 roll
137.624	120 cm x 450 m	1 roll
137.625	150 cm x 450 m	1 roll

Foam Tape
foam sealing tape



Area of application: For professionally covering openings (doors, boot lids and engine bonnets). For perfectly sealing gaps and providing an optimum paint finish.


Characteristic features: Silicone-free tape, temperature-stable up to 80°C/1 hour.

Classic: The simple geometry ensures a very easy and universal application.

Prisma: The simple geometry ensures a very easy application on flat car body edges.

Winkel: The simple geometry ensures a very easy application on inner car body edges.

Part-no.	Name	Width	Units
138.596	Classic	13 mm	1 carton
138.600	Classic	19 mm	1 carton
135.632	Prisma	14 mm	1 carton
135.815	Winkel	14 mm	1 carton

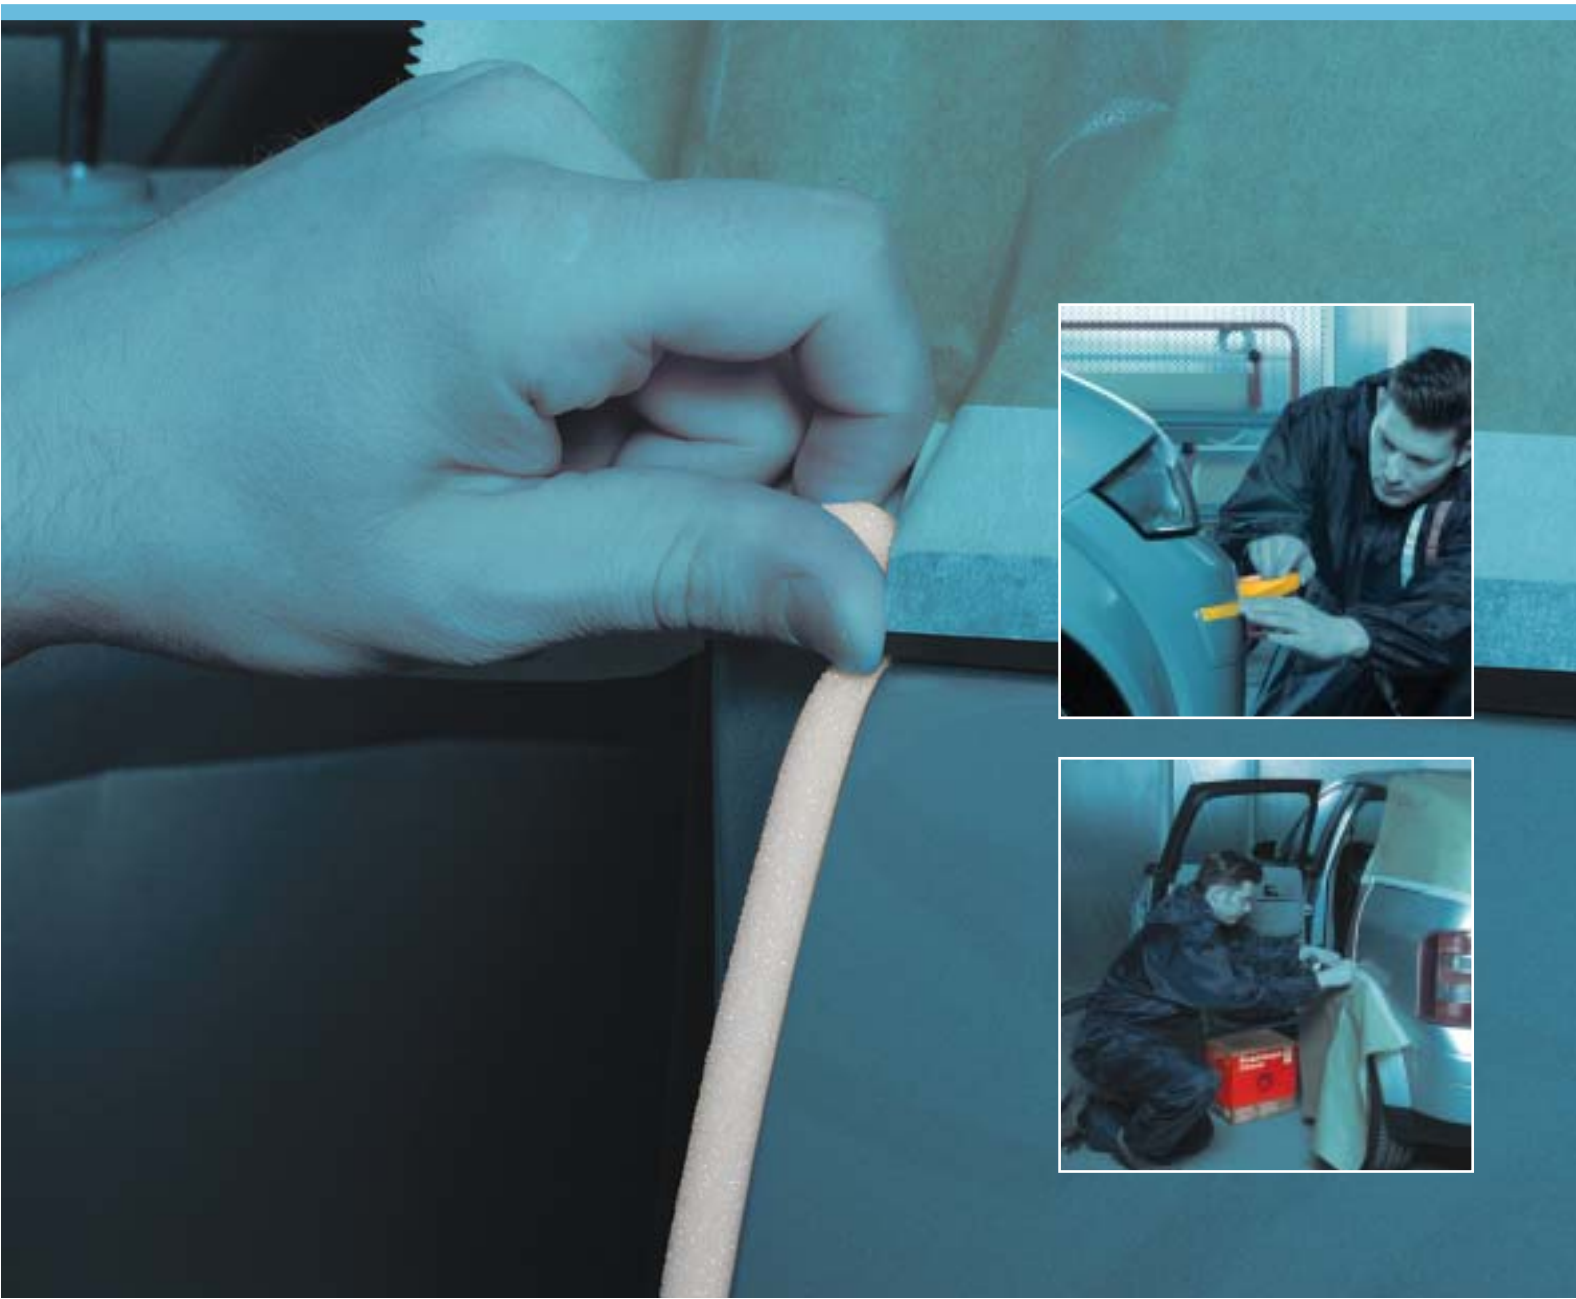

Slim Tape
special masking tape




Area of application: High-performance masking tape for problematic taping jobs, such as on rubber and plastic parts.

Characteristic features: Extremely thin, flexible, waterproof paper substrate. High curve resistance, hardly any paint edges, temperature-stable up to 100°C.

Part-no.	Dimension	Units
133.827	18 mm x 50 m	160

Master Tape
masking tape

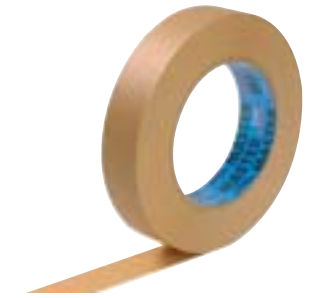

Area of application: Professional masking tape for paint shops.

Characteristic features: Waterproof, temperature-stable up to 120°C.

Part-no.	Dimension	Units
134.813	15 mm x 50 m	60
134.814	19 mm x 50 m	60
134.815	25 mm x 50 m	36
134.816	30 mm x 50 m	30
134.817	38 mm x 50 m	24
134.818	50 mm x 50 m	18

Top Tape
masking tape



Area of application: Standard masking tape for paint shops.

Characteristic features: Temperature-stable up to 80°C.

Part-no.	Dimension	Units
139.262	15 mm x 50 m	60
139.263	19 mm x 50 m	48
139.264	25 mm x 50 m	36
139.265	30 mm x 50 m	32
139.266	38 mm x 50 m	24
139.267	50 mm x 50 m	24

Classic Tape
masking tape



Area of application: Standard masking tape for all preparatory works.

Characteristic features: Temperature-stable up to 70°C.

Part-no.	Dimension	Units
125.536	19 mm x 50 m	48
125.537	25 mm x 50 m	36
125.538	30 mm x 50 m	30
125.551	38 mm x 50 m	24
125.559	50 mm x 50 m	18

Fine-Line Tape

paint line tape



Area of application: Masking tape for multi-colour and design painting jobs. Suitable for both curves and long straight lines.

Characteristic features: Temperature-stable up to 100°C.

Part-no.	Dimension	Units
125.619	3 mm x 55 m	10
125.634	6 mm x 55 m	10
125.635	9 mm x 55 m	10
125.638	12 mm x 55 m	10
125.648	19 mm x 55 m	10

Silver Tape

tissue tape



Area of application: Universal tape suitable for high stress bonding and edge protection during sanding.

Characteristic features: High-quality coated, woven tape with very high adhesion and excellent low-temperature and heat resistance.

Part-no.	Dimension	Units
135.715	50 mm x 50 m	18

WR-Lifting Tape

masking tape with plastic strip



Area of application: Special masking tape for protecting rubber profiles on bonded windcreens as well as for covering headlamps, rear lights and direction indicators.

Characteristic features: Consisting of a masking tape and a high-strength transparent plastic strip. Waterproof, temperature-stable up to 120°C.

Part-no.	Dimension	Units
137.298	9 mm x 10 m	4
137.312	18 mm x 10 m	4
137.313	25 mm x 10 m	4

